

## CSA Standard PVC Conduit

Rigid PVC Conduit, DB2 Rigid PVC conduit, Electrical Nonmetallic Tubing



Ctube CSA standard conduits system is designed with quality and excellent performances. Suitable for exposed, concrete encased and direct burial applications.






## Rigid PVC Conduit

Standard: CSA C22.2 No. 211.2 and UL651  
 Color can be made in grey and orange.  
 PVC material with great corrosion resistant.  
 Weather resistant.  
 Fire resistant.  
 Chemical resistant.  
 Nonconducting.  
 Concrete tight.  
 Rated for use with 75°C conductors.  
 Provided with nominal lengths in 10ft or 20ft. Suitable for exposed, concrete encased and direct burial applications.

Item No.	Trade Size	Metric Size	Average OD		Average ID		Min T	
			Inches	mm	Inches	mm	Inches	mm
CT-CSRCA	1/2	16	0.840	21.23	0.622	15.8	0.109	2.77
CT-CSRCB	3/4	21	1.050	26.57	0.824	20.9	0.113	2.87
CT-CSRCC	1	27	1.315	33.27	1.049	26.6	0.133	3.38
CT-CSRCD	1-1/4	35	1.660	42.04	1.380	35.1	0.140	3.56
CT-CSRCE	1-1/2	41	1.900	48.11	1.610	40.9	0.145	3.68
CT-CSRCF	2	53	2.375	60.17	2.067	52.5	0.154	3.91
CT-CSRCG	2-1/2	63	2.875	72.85	2.469	62.7	0.203	5.16
CT-CSRCH	3	78	3.500	88.70	3.068	77.9	0.216	5.49
CT-CSRCI	3-1/2	91	4.000	101.40	3.548	90.1	0.226	5.74
CT-CSR CJ	4	103	4.500	114.07	4.026	102.3	0.237	6.02
CT-CSRCK	5	129	5.563	141.05	5.047	128.2	0.258	6.55
CT-CSRCL	6	155	6.625	168.00	6.065	154.1	0.280	7.11
CT-CSR CM	8	200	8.620	219.00	7.980	202.6	0.322	8.18

Dimensions are nominal

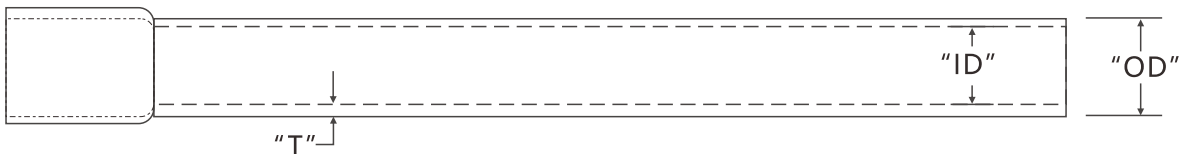




## DB2 Rigid PVC Conduit


**Standard:** CSA C22.2 No.211.1  
 Color can be made in grey and orange.  
 PVC material with great corrosion resistant.  
 Fire resistant.  
 Chemical resistant.  
 Nonconducting.  
 Concrete tight.  
 Provided with nominal length in 10ft or 20ft. Intended for use in concrete encased or masonry and direct burial applications.

Item No.	Trade Size	Metric Size	Average OD(mm)		Min Average ID	Min T
			min	max	mm	mm
CT-DB2RCA	2	53	57.00	57.30	50.80	2.02
CT-DB2RCB	3	78	82.35	82.75	76.20	2.40
CT-DB2RCC	3-1/2	91	94.50	95.00	88.40	2.60
CT-DB2RCD	4	103	106.85	107.30	100.10	3.06
CT-DB2RCE	4-1/2	116	121.20	121.70	114.30	3.20
CT-DB2RCF	5	129	134.35	134.85	126.35	4.00
CT-DB2RCG	6	155	159.10	159.65	149.75	4.20

Dimensions are nominal

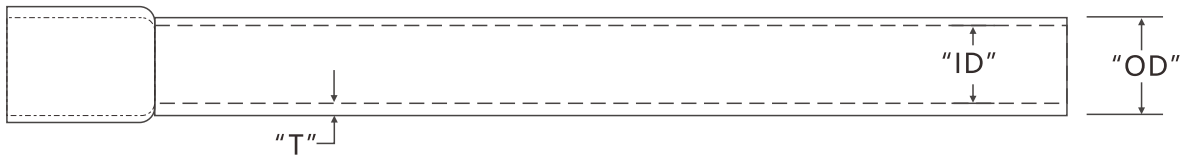




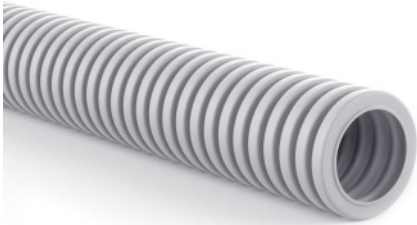

## Electrical Nonmetallic Tubing

Standard: UL1653, CSA C22.2 NO. 227.1  
 Color can be made in grey and blue.  
 PVC material with great corrosion resistant.  
 Fire resistant.  
 Impact resistant.  
 Deflection resistant.  
 Nonconducting.  
 Concrete tight.  
 Intended for encased in concrete, concealed in walls or ceilings,  
 or in direct burial applications.

Item No.	Size	Average OD		Average ID		length per Coil	
		Inches	mm	Inches	mm	unit	ft
CT-ENTA	1/2	0.840	21.34	0.602	15.29	roll	100
CT-ENTB	3/4	1.050	26.67	0.804	20.42	roll	100
CT-ENTC	1	1.315	33.40	1.029	26.14	roll	100
CT-ENTD	1-1/4	1.660	42.17	1.360	34.55	roll	100
CT-ENTE	1-1/2	1.900	48.26	1.590	40.39	roll	100
CT-ENTF	2	2.375	60.36	2.047	51.99	roll	100
CT-ENTG	2-1/2	2.866	72.80	2.469	62.70	roll	100





## Headquarter

TAIWANG CTUBE PIPE INDUSTRY TECHNOLOGY CO.LTD

Sevrice Hotline: 400-992-3828

Email:info@c-tube.net

## Factory Centre A

GUANGDONG CTUBE INDUSTRY CO.LTD

📍 A.B.C Zone, ChenTan NiNiu Industry JiaoLi  
Village ZhongTang Town Dongguan City China.

☎ +86-769-81200072

☎ +86-769-81200075

✉ info@c-tube.net

## Ctube Marketing Sales Centre

📍 No. 01, 15th Floor, Sunbelieve International Building,  
Wanjiang District, Dongguan City, China

☎ +86-769-8120071

☎ +86 15817718199

✉ info@c-tube.net

## Factory Centre B

CTUBE( LECHANG)PIPE INDUSTRY TECHNOLOGY CO.LTD

📍 No. 12, Huanyuan East Road, Lechang Industrial Transfer  
Industrial Park, Lechang City, Shaoguan City, China

☎ +86-0751-5583311

☎ +86-0751-5583399.

✉ info@c-tube.net